


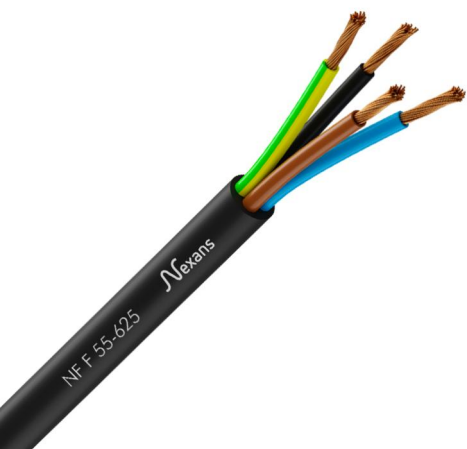

CONTACT

Market information
industryprojects.business@lynxeogroup.com

STANDARDS

Product EN 50575; EN 60228

Installation NF F 55-625

APPLICATION

These cables are used for fixed power or lighting installations in tunnels and underground stations.

FIRE PERFORMANCE

- Flame retardant: according to RATP K20 specification
- Fire retardant: according to RATP K20 specification
- Low smoke: according to RATP K20 specification
- Low toxicity: According to RATP K20 specification
- Low corrosivity: According to RATP K20 specification
- Without Halogen : According to RATP K20 specification

Reaction to fire: B2ca-s1a, d0, a1

DESIGN

- **Conductor:** Bare copper class 5
- **Insulation:** Cross-linked Polyethylene (XLPE)
- **Assembling:** An inner sheath acting as a filler
- **Outer sheath:** Polyolefin without halogen. Colour: black

Core identification

According to NF F 55625

2x: black - blue

3x: black - grey - brown

3G: black - blue - green/yellow

4x: black - blue - brown - black

4G: black - blue - brown - green/yellow

5G: black - blue - brown - black - green/yellow

≥ 7 conductors: black cores printed with numbers with or without green/yellow



Halogen free
IEC/EN 60754-1



Flame retardant
IEC/EN 60332-1-2



Smoke density
IEC 61034-2 & EN 61034-2



Gases corrosivity
IEC/EN 60754-2



Max. conductor temp. in service
90 °C



Operating temp.
-20 ... 60 °C

CHARACTERISTICS

Construction characteristics

Conductor material	Plain copper
Insulation	XLPE (Cross-linked Polyethylene)
Outer sheath	Halogen free polyolefin
Halogen free	IEC/EN 60754-1
With Green/Yellow core	No

Dimensional characteristics

Number of cores	2
Conductor cross-section	1.5 mm ²
Maximum outer diameter	11.5 mm
Approximate weight	161 kg/km

Usage characteristics

Flame retardant	IEC/EN 60332-1-2
Smoke density	IEC 61034-2 & EN 61034-2
Gases corrosivity	IEC/EN 60754-2
Max. conductor temperature in service	90 °C
Operating temperature, range	-20 ... 60 °C

PRODUCT LIST

Reference	Country Ref.	Name
☎ 10270798	-	NF F 55-625 (K25) 750V S2x1.5 B2ca-s1a, d0, a1

☎ = Make to order, 📦 = In stock,

COMPLEMENT

Bending Radius

r = 6 x maximum outer diameter

SELLING AND DELIVERY INFORMATION

Marking

750 V cables : 750 - Nber of cores & cross-section - S - SH - NF F 55-625 - LYNXEO 279 - WW - YY - B2ca-s1a, d0, a1 - Manufacturing number DoP:1000148-FRME + metric marking

Halogen free
IEC/EN 60754-1Flame retardant
IEC/EN 60332-1-2Smoke density
IEC 61034-2 & EN 61034-2Gases corrosivity
IEC/EN 60754-2Max. conductor temp. in service
90 °COperating temp.
-20 ... 60 °C

1000 V cables : 1000 - Nber of cores & cross-section - S - SH - NF F 55-625 - LYNXEO 279 - WW - YY - B2ca-s1a, d0, a1 - Manufacturing number DoP:1000148-FRME + metric marking



Halogen free
IEC/EN 60754-1



Flame retardant
IEC/EN 60332-1-2



Smoke density
IEC 61034-2 & EN 61034-2



Gases corrosivity
IEC/EN 60754-2



Max. conductor temp. in service
90 °C



Operating temp.
-20 ... 60 °C