



Reference: 10098143
EAN 13: 3427580121340

CONTACT

Market information
 industryprojects.business@lynxéogroup.com

- Instrumentation cables 300 V
- Overall screen (OS)
- **Low smoke, low halogen (LSLH)**
- **Oil resistant**

STANDARDS

Producto IEC 60228

Ensayo IEC 60332-3-22 Cat.A; IEC 60754; IEC 61034

APPLICATIONS

These cables are intended for transmission of analogue and digital signals. They allow transmission over long distances at high pulse rates. These cables are used in industrial installations such as refineries, chemical plants etc...

Design

Conductor:

Stranded bare copper (class 2)

Insulation:

Polyethylene (PE)

Overall screen:

Tinned copper drain wire

Aluminium/polyester tape

Outer sheath:

Polyvinyl chloride (PVC)

Special low smoke, low halogen (LSLH)

Colour: black or blue

Fire retardant: IEC 60332-3-22(A), limiting oxygen index > 30 as par ASTM D 2863

Low smoke: IEC 61034-2, transmittance > 40 %

Low halogen: IEC 60754-1 HCL < 6 %

Core identification

Pair: Black/white

For multipair White core printed with pair number

Marking

NEXANS 279 YYY RE - 2Y(St)Y - fl LSLH 300V Nber of pairs & cross-section IEC 60332-3-22(A) + metric marking



Flexibilidad del conductor
 Rígido, Clase 2



No propagador del incendio
 EN IEC 60332-3-22 (cat A)



Désignation

RE: Instrumentation cable
 2Y: Polyethylene insulation
 (St): Collective screen
 Y: PVC sheath



Densidad de los humos
 Baja



Temp. ambiente de utilización
 -20 ... 60 °C



Max.conductor temp.in service
 70 °C

fl Reduced flame propagation

All drawings, designations, specifications, dimensions, weights, size and dimensions contained in the technical or commercial documentation of Lynxéo is indicative only and shall not be binding on Lynxéo or be treated as constituting a representation on the part of Lynxéo.

CHARACTERISTICS

Características de construcción

| | |
|----------------------------|---|
| Material del conductor | Cobre desnudo |
| Flexibilidad del conductor | Rígido, Clase 2 |
| Aislamiento | Polietileno |
| Overall screen | Tinned copper drain wire + aluminium/polyester tape |
| Cubierta exterior | PVC |
| Color de cubierta | Negro |

Características dimensionales

| | |
|--------------------------|----------------------|
| Sección del conductor | 1,34 mm ² |
| Número de pares | 16 |
| Diámetro exterior mínimo | 21,6 mm |
| Diámetro exterior máximo | 23,9 mm |
| Peso aproximado | 694 kg/km |

Características eléctricas

| | |
|----------------------|-------|
| Tensión de operación | 300 V |
|----------------------|-------|

Características de uso

| | |
|---|---------------------------|
| No propagador del incendio | EN IEC 60332-3-22 (cat A) |
| Resistencia a aceites | ASTM D 1047 |
| Densidad de los humos | Baja |
| Temperatura ambiente de utilización (rango) | -20 ... 60 °C |
| Temperatura máxima del conductor | 70 °C |
| Standard | EN |

ELECTRICAL CHARACTERISTICS AT 20°C

Electrical data AT 20°C

| Cables (mm ²) | Conductor Resistance max. (Ohm / km) | Insulation Resistance min. (Mohm.km) | Mutual Capacitance at 800 Hz maximum (nF / km) | | | L/R ratio max (µH / ohm) | Test Voltage (core/core) (V) |
|---------------------------|--------------------------------------|--------------------------------------|--|---------------|---------------|--------------------------|------------------------------|
| | | | Single pair | Up to 4 pairs | Above 4 pairs | | |
| 0.5 | 36.7 | 5 000 | 115 | 95 | 80 | 25 | 2 000 |
| 0.75 | 24.9 | 5 000 | 115 | 95 | 80 | 25 | 2 000 |
| 1.34 | 14.2 | 5 000 | 115 | 95 | 80 | 40 | 2 000 |



Flexibilidad del conductor
Rígido, Clase 2



No propagador del incendio
EN IEC 60332-3-22 (cat A)



Resistencia a aceites
ASTM D 1047



Densidad de los humos
Baja




Temp. ambiente de utilización
-20 ... 60 °C



Max.conductor temp.in service
70 °C

CORE IDENTIFICATION FOR 2 PAIR CABLES

2 pairs: black P1 - black P2
white P1 - white P2

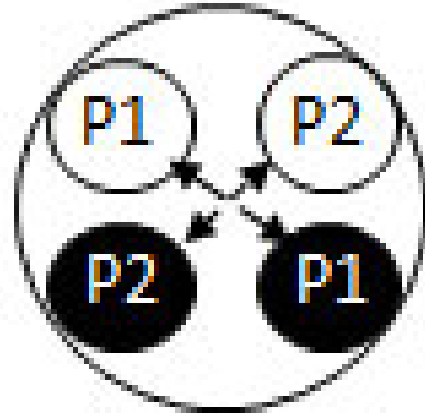

SELLING AND DELIVERY INFORMATION

Minimum bending radius:

10 x outer diameter
To be doubled during laying operations

2 pair cables are assembled as a quad (black and white cores both printed with pair number)



Flexibilidad del conductor
Rígido, Clase 2



No propagador del incendio
EN IEC 60332-3-22 (cat A)



Resistencia a aceites
ASTM D 1047



Densidad de los humos
Baja



Temp. ambiente de utilización
-20 ... 60 °C



Max.conductor temp.in service
70 °C